

Model No.: **GP15G**
LEAD FREE BATTERY

NO MERCURY, CADMIUM & LEAD ADDED	
Description	: Extra Heavy Duty Battery, AA Size
Chemical System	: Zinc-Manganese dioxide (Zinc Chloride)
Nominal Voltage	: 1.5 Volts
Max. Dimensions	: ϕ 14.5mm \times 50.5mm
Terminals	: Protruded positive(+) and flat negative(-) contacts
Jacket	: Metal jacket with insulation tube
Applications	: All electronic devices, e.g. transistor radios, tape recorders, toys, alarm clocks, remote control, portable fans.
Warranty Period	: 36 months (Storing at -10°C to 25°C and 60 \pm 20%RH)
Weight(Reference)	: 17.3g


Cross References:

GP	IEC	JIS	ANSI
15G	R6P	R6P	15D


Typical Service Life:

Discharge Resistance	Discharge Condition	End Point Voltage	Service Life
10 Ohms	24 hr/day	0.9V	360mins

10 Ohms 24hr/day E. V= 0.9V

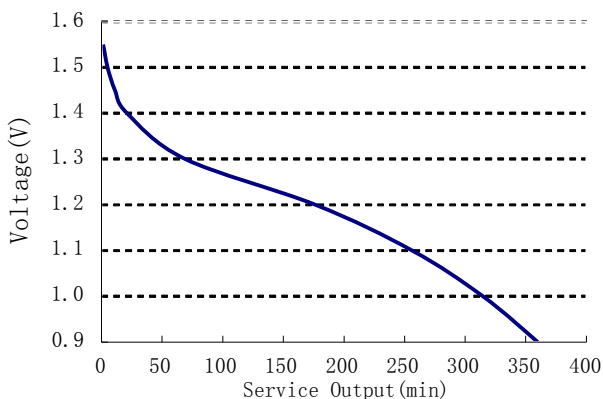

At 20 \pm 2°C within 60 days of manufacture

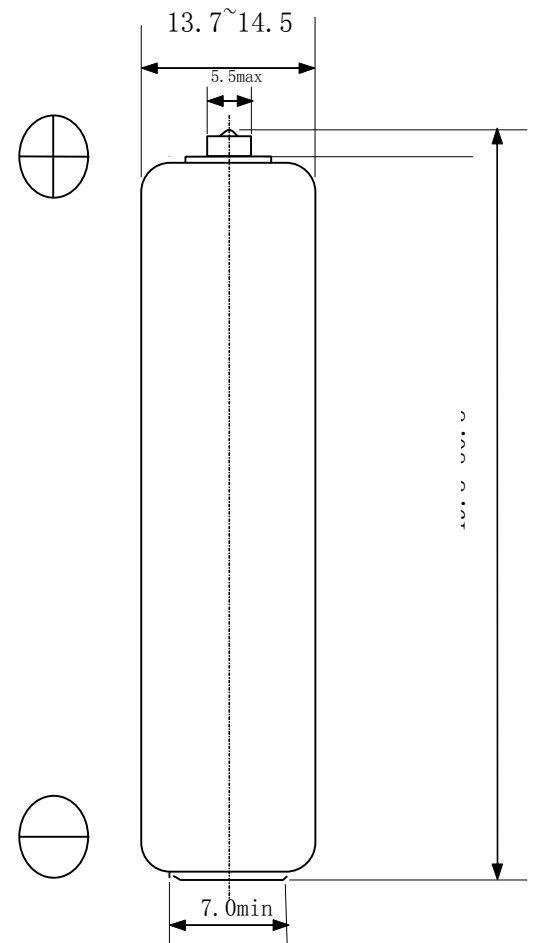

Unit: mm

The information (subject to change without prior notice) contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult your nearest GP Sales and Marketing Office or Distributors