


BK1100FHU

High temperature & long life type



■ Dimensions (with tube)

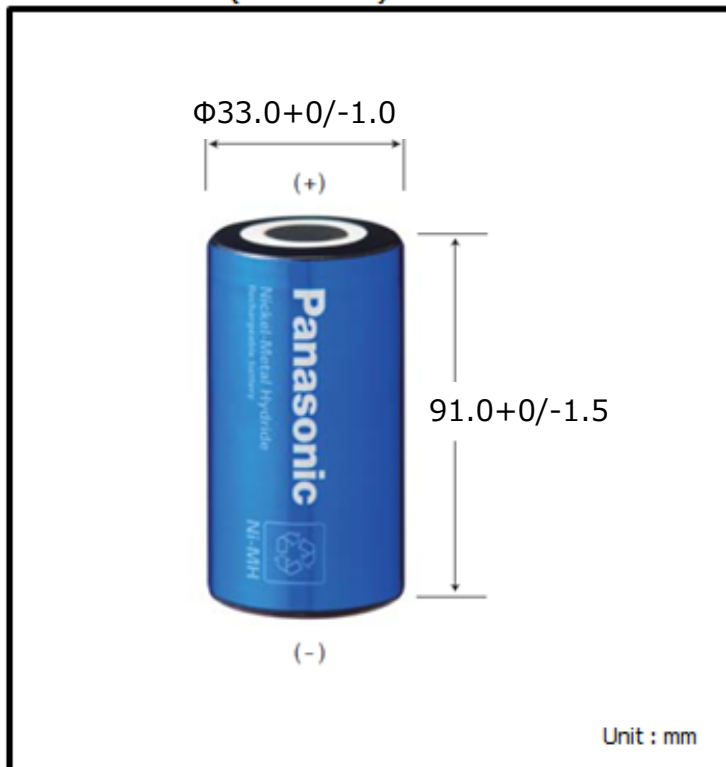

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

■ Specifications

Diameter		33.0 +0 / -1.0 mm
Height		91.0 +0 / -1.5 mm
Approximate Weight		300g
Nominal Voltage		1.2V
Discharge*1	Average*2	11300 mAh
	Capacity Rated (min.)	11000 mAh
Approx. Internal Impedance at 1000Hz at charged state.		5 mΩ
Charge	Standard	1100 mA X 16 hrs.
	Rapid*3	5500 mAh X 2.4 hrs.
	Low rate	550 mA X 32 hrs. 367 mA X 48 hrs.
Ambient Temperature	Charge	Low rate
	Standard	-30 °C to 75 °C
	Rapid	-30 °C to 60 °C
Discharge		-40 °C to 85 °C
Storage	<1 year	-20 °C to 35 °C
	<6 months	-20 °C to 45 °C
	<1 month	-20 °C to 55 °C
	<1 week	-20 °C to 65 °C

*1 After charging at 0.1 It for 16 hours, discharging at 0.2 It

*2 For reference only.

*3 Need specially designed control system. Please contact Panasonic for details.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [NiMH - Nickel Metal Hydride Battery](#) category:

Click to view products by [Panasonic](#) manufacturer:

Other Similar products are found below :

[HHR-75AAA/B](#) [BK-110FHB01](#) [NH1250AA](#) [NH-3000SC](#) [HHR200SCP](#) [NH-2100A](#) [NH-600AAA](#) [NH-B320](#) [HHR-26SCPY01](#) [NH-1500AA](#)
[NH-1250AAL](#) [NH-7000D](#) [BK-200AAB9B](#) [BK-250AB01](#) [BK-80AAAB9B](#) [HHR-200AB20](#) [HHR-210AB18](#) [HHR-25SCHY03](#) [HHR-](#)
[300CHA03](#) [HHR-30SCPY20](#) [HHR-370AHA05](#) [HHR-60AAAHB2](#) [HHR-75AAAB5B](#)