




For use with only 3AAs:  
Place batteries in positive position & 2 near  
negative positions of the battery cartridge

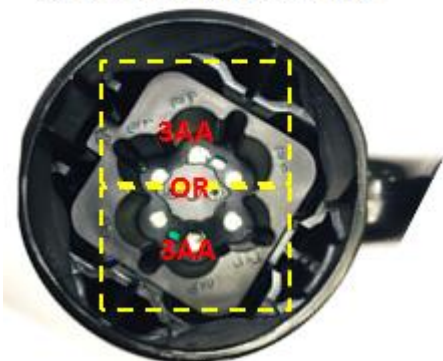

**Designation:**..... 18751 101 001(bulk)/18751 101 421 (packed)

**Battery requirement:** . 6xAA / 3xAA Alkaline battery

**Bulb required:**..... 1 pcs Samsung LH351C 6500K cool white LED

Mode 6AA	High	Low
Luminous intensity (lm) (with lens off)	400	50
Beam range (m )	400	145
<b>Range: (calculated distance at maximum luminous intensity with an illuminance of 0.25 lux)</b>		
Mode 3AA	High	Low
Luminous intensity (lm) (with lens off)	350	40
Beam range (m )	380	140

**Weight:**..... 520 g (without batteries)

**Material:**..... PC (Polycarbonate)  
TPR (Thermoplastic Rubber)  
All contact parts made of aluminium, bronze  
or nickel plated steel

**Dimensions:**..... **A: 125 mm**  
**B: 150 mm**  
**C: 84 mm**

**Run Time:**..... **6AA (with Varta LLP)**  
**High 10 h**  
**Low: 85 h**  
**3AA (with Varta LLP)**  
**High: 4 h**  
**Low: 50 h**

**Features:**

4meters drop test

Super bright 6W cool white LED

Push switch (High/Low/Off) on hand for easy of use

Deep & narrow reflector provided long beam

Comfortable handle

Extra thick housing & rubber head for maximum durability

Passed extreme temperature shock test

Eye risk group 2

IP54 Dust resistant & water resistant

Pass IK08 impact

10,000 Switch cycle life

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**